




**KLINGERSIL® C-4509 - premium high-pressure gasket able to withstand very high thermal and mechanical stresses.**

Carbon fibers, special high temperature-resistant additives and an NBR bonding make up this special high-pressure high-pressure gasket. Its expanded metal reinforcement makes it capable of withstanding the highest thermal and mechanical stresses and high bolt loads. This gasket material is the first choice for the chemical industry, where it is mainly used in tandem with alkaline media and steam. The basic material KLINGERSIL® C-4500 is a Fire-Safe grade.

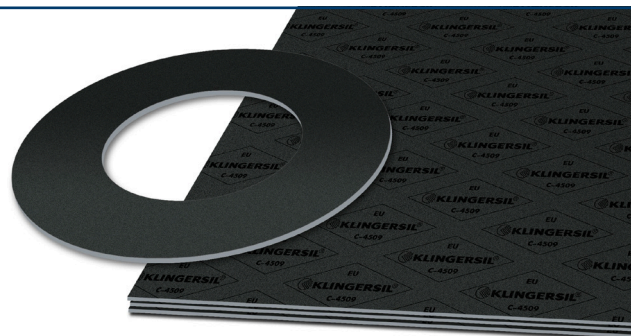

<b>Basis composition</b>	Carbon fibers and special high temperature-resistant additives bonded with NBR.
<b>Color</b>	Black
<b>Certificates</b>	DNV GL approval

<b>Sheet size</b>	1000 x 1500 mm, 2000 x 1500 mm
<b>Thickness</b>	1.0 mm, 1.5 mm
<b>Tolerances</b>	Thickness according to DIN 28091-1 Length: ± 50 mm Width: ± 50 mm


**Industry**

General industry / Chemical / Oil & Gas / Energy / Pulp & Paper / Marine / Automotive

**TECHNICAL DATA** - Typical values for a thickness of 1.5 mm

Compressibility	ASTM F 36 J	%	10
Recovery	ASTM F 36 J	%	62
Stress relaxation DIN 52913	50 MPa, 16 h/300°C	MPa	43
Stress relaxation BS 7531	40 MPa, 16 h/300°C	MPa	41
KLINGER cold/hot compression 50 MPa	thickness decrease at 23°C	%	8
	thickness decrease at 300°C	%	6
Thickness increase after fluid immersion ASTM F 146	oil IRM 903: 5 h/150°C	%	3
	fuel B: 5 h/23°C	%	5
Density		g/cm <sup>3</sup>	2.0
ASME-Code sealing factors for gasket thickness 1.5 mm	tightness class 0.1mg/s x m	MPa	y 30 m 4.0


**P-T diagram - thickness 1.5 mm**

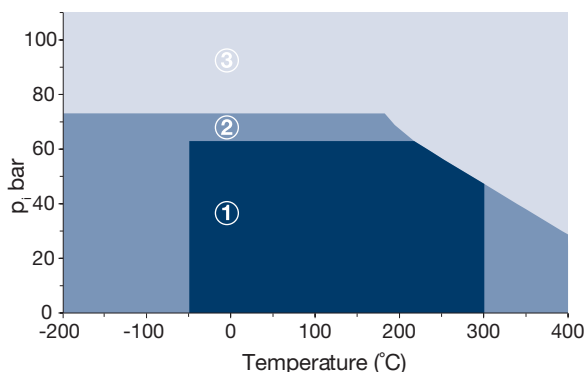

**The area of the P-T diagram**

- ① In area one, the gasket material is normally suitable subject to chemical compatibility.
  - ② In area two, the gasket material may be suitable but a technical evaluation is recommended.
  - ③ In area three, do not install the gasket without a technical evaluation.
- Always refer to the chemical resistance of the gasket to the media.


**Sigma BO**

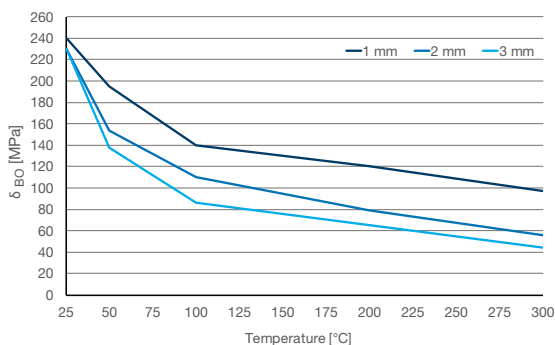

**Maximum surface pressure in operating conditions of Sigma BO**

This diagram shows the maximum surface pressure in MPa with which the sealing material may be loaded, depending on the operating temperature. The characteristic curves apply to the specified sealing thicknesses. In contrast to Qsmax according to EN 13555, the surface pressures specified here are based on a maximum permissible reduction in thickness.

**Tightness performance**

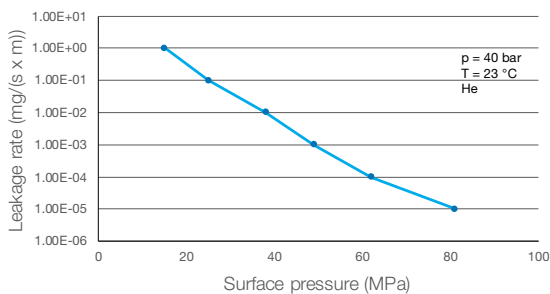

**The tightness performance graph**

The graph shows the required stress at assembling to seal a certain tightness class. The determination of the graph is based on EN13555 test procedure which applies 40bar Helium at room temperature. The sloping curve indicates the ability of the gasket to increase tightness with raising gasket stress.

**Chemical resistance chart**

Simplified overview of the chemical resistance depending on the most important groups of raw materials:

KLINGERSIL® C-4509						A: small or no attack	B: weak till moderate attack	C: strong attack			
Paraffinic hydrocarbon	Motor fuel	Aromates	Chlorinated hydrocarbon fluids	Motor oil	Mineral lubricants	Alcohol	Ketone	Ester	Water	Acid (diluted)	Base (diluted)
<b>A</b>	<b>B</b>	<b>C</b>	<b>C</b>	<b>A</b>	<b>B</b>	<b>A</b>	<b>C</b>	<b>C</b>	<b>A</b>	<b>A</b>	<b>A</b>

For more information on chemical resistance please contact us

All information is based on years of experience in production and operation of sealing elements. However, in view of the wide variety of possible installation and operating conditions one cannot draw final conclusions in all application cases regarding the behaviour in gasket joint. The data may not, therefore, be used to support any warranty claims. This edition cancels all previous issues. Subject to change without notice.

---

**KLINGER Limited**

**AUSTRALIA**

Western Australia - Head Office  
38 McDowell Street  
Welshpool WA 6106

Queensland  
Unit 3, 5-7 Roseanna Street  
Gladstone QLD 4680

Tel: 1300 798 279  
(calls within Australia)

Tel: +61 8 9251 1688  
(calls outside Australia)

**NEW ZEALAND**

Tel: +64 272 735 045

**SINGAPORE**

105 Cecil Street #07-01, The Octagon  
Singapore 069534  
Tel: +65 6827 9045

**KLINGER Thailand**

501/2 Moo 2, Tambol Mabyangporn  
Amphur Ruak Daeng  
Rayong 21140 Thailand  
Tel: +66 3306 0154