



Swelling in oil and fuels KLINGERSIL® C-6327 offers an excellent conformity with flanges at low surface loads.

Aramid fibres and inorganic fibres bonded with SBR. Fields of application: Body gaskets for liquids and steam at lower pressures and temperatures and low bolt loads, e.g. transformer gaskets.



### Key features:

- » Use of SBR rubber as binder
- » High compressibility


### Benefits:

- » Controlled swelling in oils and fuels
- » Provides very good adaptability to any sealing surface
- » Conforms easily
- » Excellent sealing at low stress

### Certificates and approvals:

- » AS4020 Potable Water

### Properties: referring to KLINGERSIL® product range

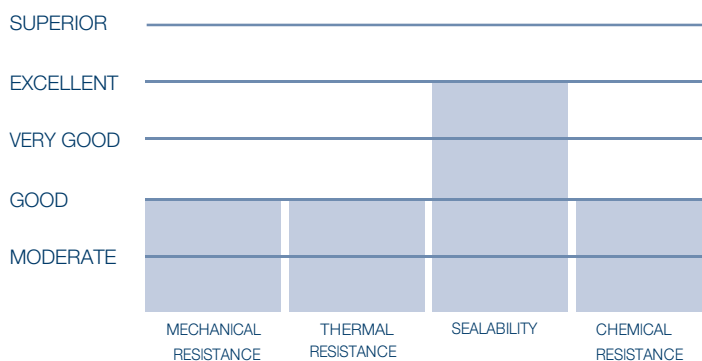

### Industries:

INDUSTRY	CHEMICAL	OIL & GAS	ENERGY	INFRASTRUCTURE	PULP & PAPER	TRANSPORT	FOOD & BEVERAGES	PHARMA

## Typical technical data for thickness 2.0 mm:

Compressibility ASTM F 36 J		%	25
Recovery ASTM F 36 J		%	45
Stress relaxation DIN 52913	50 MPa, 16 h/175°C	MPa	25
KLINGER cold/hot compression	thickness decrease at 23°C	%	20
50 MPa	thickness decrease at 300°C	%	32
Tightness	DIN 28090-2	mg/s x m	0.02
Thickness increase after fluid	oil IRM 903: 5 h/150°C	%	45
immersion ASTM F 146	fuel B: 5 h/23°C	%	30
Density		g/cm <sup>3</sup>	1.7
Average surface resistance	pO	Ω	4.5x10E14
Average specific volume resistance	pD	Ω cm	6.8x10E13
Average dielectric strength	E <sub>d</sub>	kV/mm	13
Average power factor	50 Hz	tan δ	0.049
Average dielectric coefficient	50 Hz	ε <sub>r</sub>	5.8

## Dimensions of the standard sheets:

Sizes:

1000 x 1500 mm, 2000 x 1500 mm

Thicknesses:

0.5 mm, 1.0 mm, 1.5 mm


Tolerances:

Thickness acc. DIN 28091-1

Length  $\pm 50$  mm, width  $\pm 50$  mm

Other thicknesses, sizes and tolerances on request.

## pT diagram for thickness 2.0 mm:

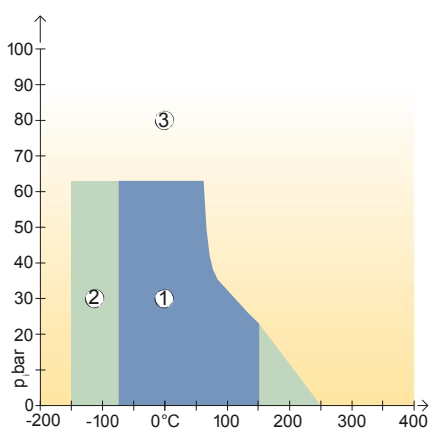

①

In area one, the gasket material is normally suitable subject to chemical compatibility.

②

In area two, the gasket material may be suitable but a technical evaluation is recommended.

③

In area three, do not install the gasket without a technical evaluation.

Always refer to the chemical resistance of the gasket to the media.

---

**KLINGER Limited**

**AUSTRALIA**

Western Australia - Head Office  
38 McDowell Street  
Welshpool WA 6106

Queensland  
Unit 3, 5-7 Roseanna Street  
Gladstone QLD 4680

Tel: 1300 798 279  
(calls within Australia)

Tel: +61 8 9251 1688  
(calls outside Australia)

**NEW ZEALAND**

Tel: +64 272 735 045

**SINGAPORE**

105 Cecil Street #07-01, The Octagon  
Singapore 069534  
Tel: +65 6827 9045

**KLINGER Thailand**

501/2 Moo 2, Tambol Mabyangporn  
Amphur Ruak Daeng  
Rayong 21140 Thailand  
Tel: +66 3306 0154